



# AIR PULSE™ Cleaning Gun



Creates a high-velocity vortex of air and cleaning solution that powers away dirt and dust



© 2024 | Griot's Garage, Inc. | 3333 South 38<sup>th</sup> Street | Tacoma, WA 98409 | 800-345-5789

**⚠ SAVE ALL WARNINGS AND INSTRUCTIONS FOR FUTURE REFERENCE**  
Please read and understand this manual. It contains information that relates to personal protection of you and others.

*Have fun in your garage!®*

[griotsgarage.com](http://griotsgarage.com)

**User's Manual and Care Instructions**

Item: 90565

## IMPORTANT SAFETY INFORMATION



Please carefully read, understand, and follow all safety information in this manual prior to and during use of this tool. Keep these instructions handy for future reference.

### INTENDED USE

The Griot's Garage Air Pulse Cleaning Gun is designed to be used as a cleaning tool. Do not exceed air pressures higher than 90 psi and always wear appropriate safety equipment. Use in any unapproved manner could lead to unsafe operating conditions.

### EXPLANATION OF SIGNAL WORD CONSEQUENCES

- Warning:** Indicates a potentially hazardous situation which, if not avoided, may result in death or serious injury and/or property damage.
- Caution:** Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury and/or property damage.



Wear Proper Eye Protection



Wear Proper Respiratory Protection



Wear Proper Hearing Protection



Wear Gloves



Read And Follow Use Instructions



Do Not Discard In Household Waste

### GENERAL AIR TOOL SAFETY WARNINGS

- Warning:** Please read, understand, and follow all safety information contained in these instructions prior to the use of this tool. Failure to follow the warnings and instructions may result in serious injury. The term "power tool" in the warnings refers to your Griot's Garage Air Pulse Cleaning Gun. Retain these instructions for future reference.

#### 1. Work Area Safety

- a.** Keep work area clean and well lit. Cluttered or dark areas invite accidents.
- b.** Keep children and bystanders away while operating power tool. Distractions can cause you to lose control.

#### 2. Personal Safety

- a.** Practice safety requirements. Work alert, have proper attire, and do not operate tools under the influence of alcohol or drugs.
- b.** Operators and other personnel must always wear protection for eyes, ears, and respiratory protection when in the work area or while operating this product. Follow your employer's safety policy for PPE's and/or ANSI Z87.1 or local/national standards for eyewear and other personal protective equipment requirements.
- c.** The Air Pulse Cleaning Gun causes considerable noise pressure. Please wear hearing protection to avoid noise pressure. Please wear hearing protection to avoid potentially damaging sound exposure.
- d.** Small particles may be whirled into the air during use. Wear appropriate goggles or glasses to prevent eye injuries.

## POWER TOOL USAGE SAFETY

To reduce the risk of injury associated with pneumatic pressure and other mechanical hazards:

- a. NEVER** point the Air Pulse Cleaning Gun towards the face, or body of yourself or anyone else.
- b. NEVER** operate the Air Pulse Blow Gun with more than 90 psi.
- c.** Keep Air Pulse Blow Gun out of reach of children.
- d.** To reduce risk of injury, everyone using, installing, repairing, maintaining, changing accessories on, working near this tool must read and understand these instructions before performing any such task.
- e.** This tool and its parts must not be modified.
- f.** Always shut off air supply, release pressure and disconnect tool from air supply when not in use, before changing parts, or when making repairs.
- g.** Whipping hoses can cause serious injury. Always check for damaged or loose hoses and fittings.
- h.** When using cleaning fluids which need to be diluted, always strictly observe the manufacturer's instructions to ensure the dilution is correct.

- Warning:** NEVER use with flammable or acidic products.

### PRIOR TO TOOL OPERATION

- a.** The tool is intended to be operated as a handheld tool. It is always recommended that while using the tool, operators stand on a solid floor, in a secure position with a firm grip and footing.
- b.** Before use, install appropriate 1/4" male plug quick connector that matches your system. We recommend a high-flow coupler for optimal performance.
- Caution:** Use a constant, clean air supply that will give a measured air pressure at the tool of 75 to 90 psi when the tool is running with the lever fully depressed. It is recommended to use an approved 3/8" (10mm) hose with a 50' (15.24m) maximum length.
  - **Minimum Air Consumption 5.3 CFM @ 75 PSI**
  - **Optimum Air Consumption 6.4 CFM @ 90 PSI**
  - **Required Air Pressure 60-90 PSI(MAX)**

**Note:** constant air rates vary depending on size and power of the air compressor.

### USAGE

**Interior Cleaning:** Perfect for intense cleaning action addressing dirt and grim on vinyl, carpet, leather & cloth upholstery, door panels, and rocker sills.

**Engine Bay Cleaning:** Blast through layers of road grime, grease, oil, and dirt effortlessly reaching the nooks and crannies of engine bays, achieving an intensive clean.

**Pad Cleaning:** To deep clean your buffing pads, rinse with hot water, apply Microfiber and Foam Pad Cleaner using the AIR Pulse Cleaning Gun in Liquid-Mode, and then rinse and air-dry to remove excess moisture.

## SELECT CHEMICAL SOURCE

Your Air Pulse Cleaning Gun is equipped with a Dual-Threaded Cap which is compatible with the included 33.8 ounce jar, or any Griot's Garage 22 ounce or 35 ounce bottle. Additionally, any 28/400 threaded bottle neck common with most professional spray bottles.



33.8oz jar



22oz or 35oz Bottle

## SELECT CLEANING SOLUTION

Griot's Garage offers a wide range of formulas which are suitable for the Air Pulse Cleaning Gun. Pair with any of the following for outstanding results:

- Citrus All Purpose Cleaner
- Odor Neutralizing Carpet & Upholstery Cleaner
- Odor Neutralizing Leather Cleaner
- Interior Detailer
- Engine Cleaner
- Rubber Cleaner and more!

## CLEANING MODES



Liquid Mode

**CLEANING - Liquid Mode:** Turn lever into the vertical position to activate cleaning fluid flow. Activating this for initial cleaning using the AIR Pulse Cleaning Gun's cyclonic action, paired with agitation using an appropriate detailing brush will lift embedded soil. Transition to Air Mode immediately following wet cleaning.

**Note:** Avoid overspray on delicate surfaces like instrument clusters or LCD panels. Covering those surfaces with a dry, clean microfiber is an effective way to protect them.

**Note:** Always test cleaning product in an inconspicuous area to ensure compatibility.



Air Mode

**DRYING - Air Mode:** Turn lever into the horizontal position, pull the trigger and allow air flow to dry the surface, followed by a wipe using a clean microfiber towel.

While addressing the surface, work with the Air Pulse Cleaning Gun at 1 inch from the surface and a 45 degree angle.

## MAINTENANCE


- a. Following use, submerge Cone into clean water, pull trigger and run for 20 seconds.
- b. Your Air Pulse Cleaning Gun requires no lubrication.
- c. Replace damaged parts immediately. The rotate-set, nozzle, hoses, and gaskets are consumable parts and will require maintenance. These are considered “wear items” and not covered under Griot’s Garage Lifetime Warranty against manufacturer defects.

## REPLACEMENT COMPONENTS

- **Air Pulse Gun Replacement Cone:** Item# 90656A
- **Air Pulse Gun Replacement Tube:** Item# 90656B

## TOOL FEATURES

Familiarize yourself with the premium, professional-grade features of the Air Pulse Cleaning Gun.

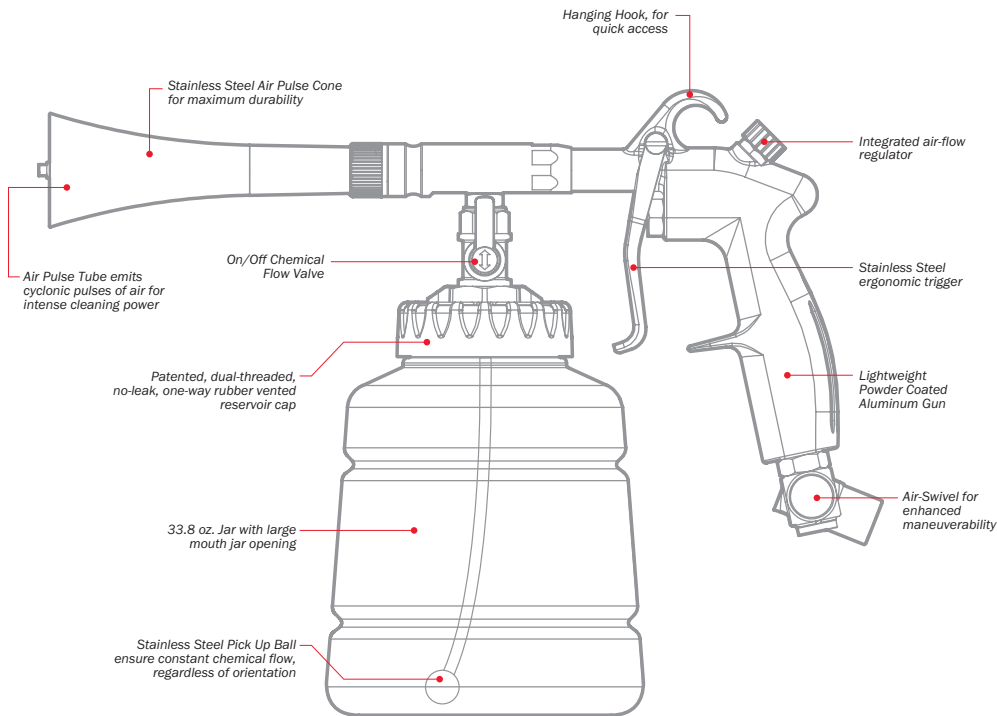

## PRODUCT USE

All statements, usage recommendations, and technical information contained in this manual are based on tests or development that Griot’s Garage has deemed reliable. However, many factors beyond Griot’s Garage’s control can affect the use and performance of this Griot’s Garage product in a certain application, including conditions under which the Griot’s Garage product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely in the user’s knowledge and control, it is critical that the user evaluate the Griot’s Garage product to determine whether it is suitable for a particular purpose and the user’s method of application.

## WARRANTY

- **Griot’s Garage Lifetime Guarantee:** Griot’s Garage will repair or replace any defective tool, without charge, due to faulty materials or workmanship for the working life of the tool, subject to certain exclusions below.
- **Six Month Satisfaction Guarantee:** We want you to enjoy our quality product and have fun with it! If you’re not 100% satisfied for any reason within six months of purchase, return it to point of sale with proof of purchase for a full refund or credit.

## EXCLUSIONS

- **Griot’s Garage Lifetime Guarantee** does not cover damage caused by failure to follow recommended maintenance, misuse, alteration, or abuse. Normal wear and tear is not considered a defect, therefore part failure which may occur as the result of ordinary use is excluded from coverage.
- **Griot’s Garage** is not responsible for any incidental or consequential damages.

## DISCLAIMER

- **Limitation of Liability:** In no event shall the monetary liability of company exceed amounts that have actually been paid to company. Company shall not be liable for consequential, indirect, special, or incidental damages under any circumstances, even if advised in advance of the possibility of such damages.

## ANSWERS TO YOUR QUESTIONS

To order additional air compressor accessories and products, or for a complete selection of Griot’s Garage products, please call us toll-free at 800-345-5789, email us at [sales@griotsgarage.com](mailto:sales@griotsgarage.com), or go to [www.griotsgarage.com](http://www.griotsgarage.com).